

Horizontal aluminium blinds Standart

1. Measuring on the window frame

Blind width – it is recommended to add 40 mm to the glass width.


Blind height – it is recommended to add to the height of the glass:

25 mm blinds 40 mm;

35 mm blinds 60 mm;

50 mm blinds 70 mm.

Important! Installed blinds can limit the opening of the window.

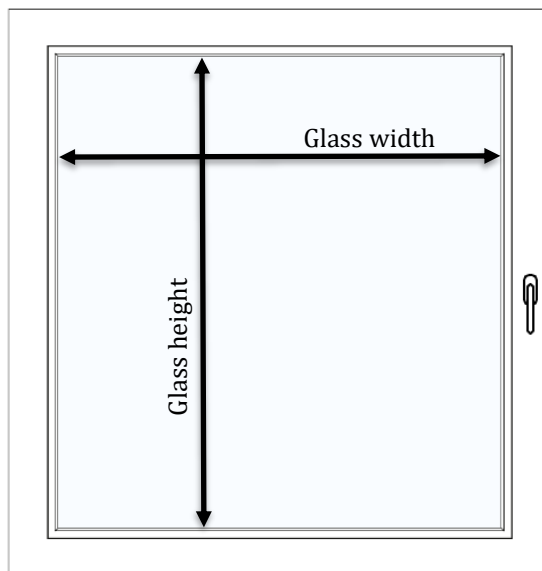


2. Measuring into a niche

Blind width – it is recommended to subtract 10 mm from the width of the niche.

Blind height – it is recommended to subtract 10 mm from the height of the niche.

Important! Installed blinds can limit the opening of the window.

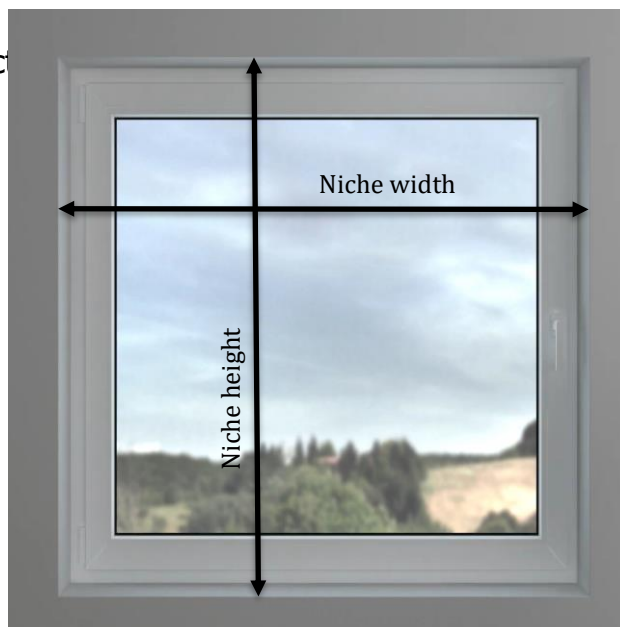

Horizontal aluminium blinds Standart

3. Measurement on niche

Blind width – it is recommended to add 80 mm to the niche width.


Blinds height – it is recommended to add to the height of the niche:

25 mm blinds 40 mm;

35 mm blinds 60 mm;




50 mm blinds 70 mm.

Important! Installed blinds can limit the opening of the window.

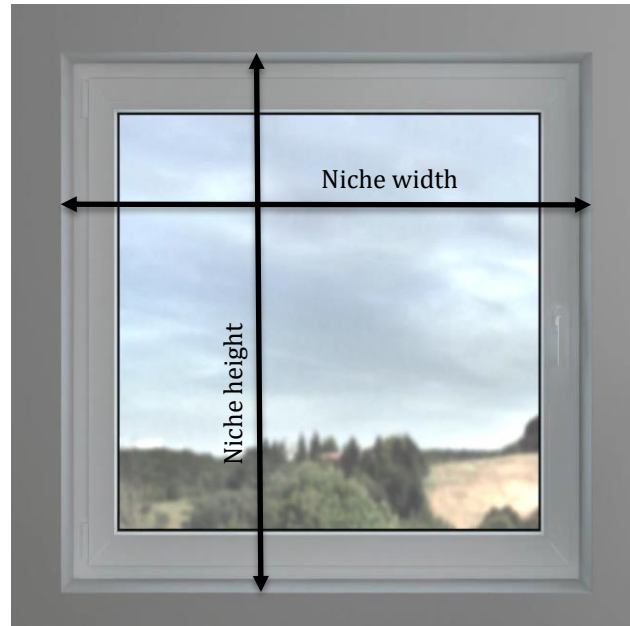

Horizontal aluminium blinds Standart

Lowered/raised blind height values, 25 mm*

Height of lowered blinds, mm	25 mm raised blind height, mm	35 mm raised blind height, mm	50 mm raised blind height, mm
			
500	55	115	105
750	60	145	130
1000	70	170	145
1250	75	195	170
1500	85	220	190
1750	90	245	210
2000	100	270	230
2250	105	300	250
2500	110	325	270
2750	120	350	290
3000	125	375	310
3250	135	400	330
3500	140	425	350

*the given dimensions are indicative. The height of the raised blind may vary due to variation in slat thickness and the placement of the ladders/strips when the blind is raised.